


# G6498X01

## OUTLINE DIMENSION AND ELECTRICAL SPECIFICATION

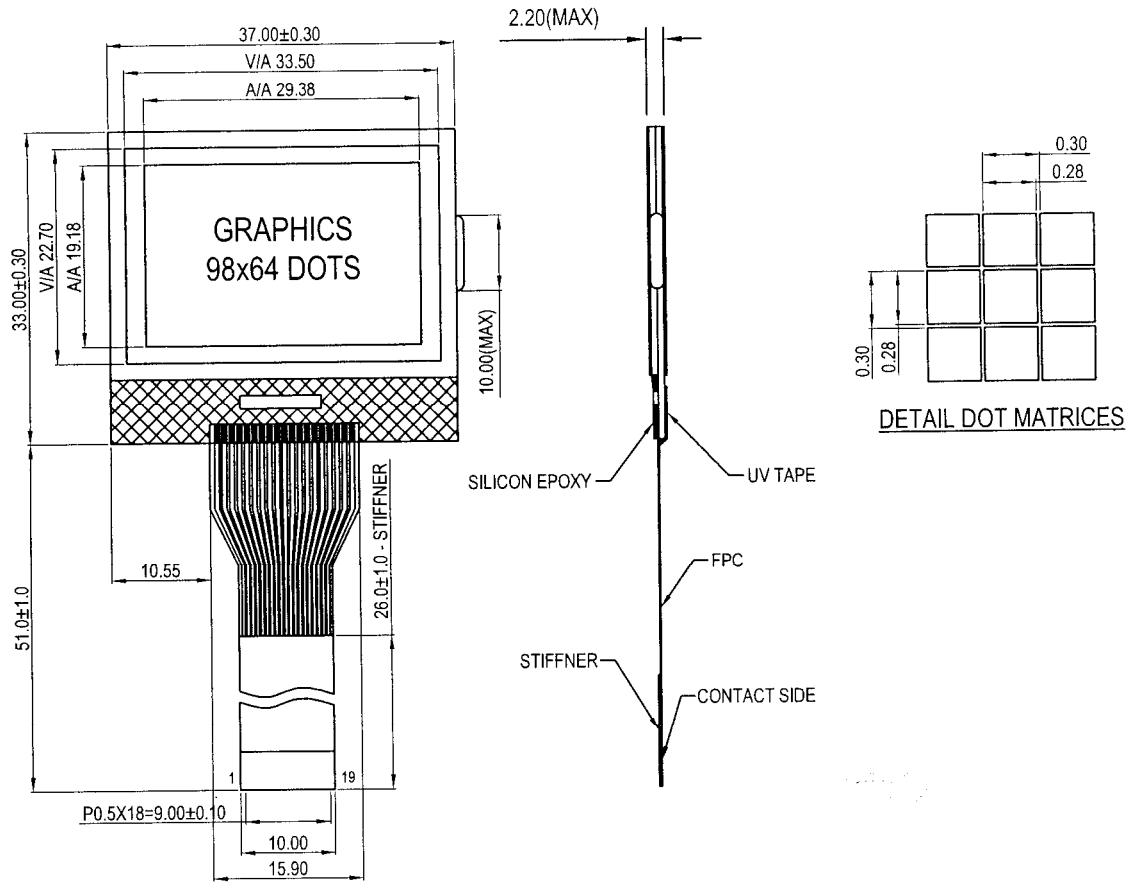

### NOTES :

- 1.VDD = 3.0V (TYP); 3.5V (MAX)
- 2.VLCD = 9.5V±5% (TYP)
- 3.IDD = 200uA (TYP); 400uA (MAX)
- 4.DUTY CYCLE = 1/64
- 5.BIAS = 1/9
- 6.CONTROLLER = SSD1818 SOLOMON
- 7.CONNECTOR = FPC
- 8.UNMARKED TOLERANCES = ±0.30mm

### PIN ASSIGNMENT

PIN	1	2	3	4	5	6	7	8
SYMBOL	VL6	VL5	VL4	VL3	VL2	C4N	C2P	C2N

PIN	9	10	11	12	13	14	15	16
SYMBOL	C1N	C1P	C3N	VEE	VSS	VDD	SDA	SCK

PIN	17	18	19
SYMBOL	D/C	/RES	/CS

### BACKLIGHT OPTION

LED COLOR	OPTION	VOLTAGE(V)	FORWARD CURRENT(mA)		
			MIN	TYP	MAX
YELLOW GREEN	NO	-	-	-	-
WHITE	NO	-	-	-	-
BLUE	NO	-	-	-	-